


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 18x17x16 for 1/4 Sec Cor

Raised stone mound at Cor.

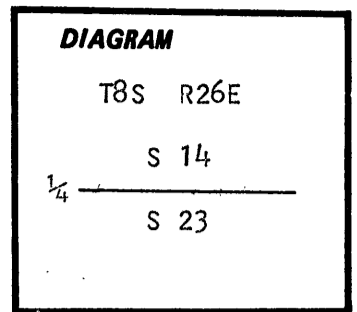

**Description of corner evidence found:**

Found stone 18x14x12 marked 1/4 in stone mound

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** In place of stone, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:

New BTs

A 19 inch diameter P.Pine bears S88°E, 26.1 feet marked 1/4 S23 BT

A 18 inch diameter P.Pine bears N20°W, 6.4 feet marked 1/4 S14 BT

Raised mound of stone around monument


Buried original stone South and alongside of monument

Set steel fence post approximately 5 feet West of monument with 54-4 sign attached

Corner set May 27, 1984

Witnesses: Rick Robinson

See map of survey dated June, 1984

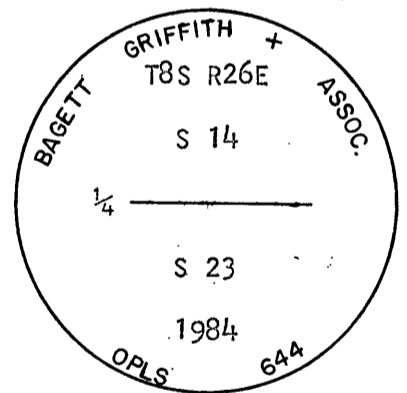

REGISTERED PROFESSIONAL LAND SURVEYOR

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 15 day of August, 1984  
Thomas W. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)