

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 14 x 10 x 6 ins. for 1/4 Section corner. Raised stone mound at corner.

P-1

### DIAGRAM

T8S  
R25E R26E  
1/4  
S24 | S19  
PLS 2645  
2014


## Description of corner evidence found:

Found a 18" x 10" x 6" stone, set cardinal in a 4' diameter mound of stone. No marks on stone. A Juniper with a Forest Service Corner location poster attached by PLS 1636 and dated 2-24-95 to the northwest, approximately 70' from stone.

## Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 4' diameter by 18" high mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. The original stone was buried along the west side of the pipe.

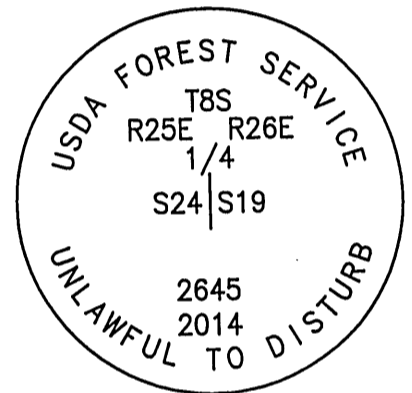

## New accessories:

A 9" Juniper scribed "1/4 S19 BT" with 1" aluminum tag marked "2645" bears N31°E, 48.7'.  
A 1/2" x 30" rebar with 1 1/2" aluminum cap stamped "RM1" bears S21°42'E, 50.3'.  
A 1/2" x 30" rebar with 1 1/2" aluminum cap stamped "RM2" bears S57°36'W, 38.5'.  
A 1/2" x 30" rebar with 1 1/2" aluminum cap stamped "RM3" bears N6°44'W, 79.7'.

## Geodetic Coordinates (NAD83):

N 44°51'33.0"

W 119°40'18.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 15, 2014

Bearings to accessories are Geodetic.

Witnesses: Robert Flora, Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018