

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 18 x 16 x 12 ins. for 1/4 Section corner. Raised stone mound at corner.

P-5

DIAGRAM

T8S R26E
1/4
S19 | S20
PLS 2645
2014


Description of corner evidence found:

No original evidence found.

Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2 1/2' diameter collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is flush with the collar of stone.

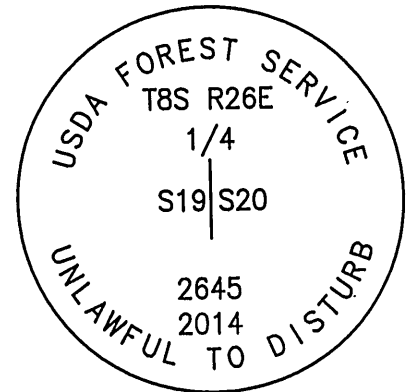

New accessories:

- A 18" Juniper scribed "1/4 S20 BT" with 1" aluminum tag marked "2645" bears N80°E, 58.8'.
- A 20" Ponderosa Pine scribed "1/4 S20 BT" with 1" aluminum tag marked "2645" bears S44°E, 32.2'.
- A 16" Ponderosa Pine scribed "1/4 S19 BT" with 1" aluminum tag marked "2645" bears S36°W, 77.2'.
- A 13" Juniper scribed "1/4 S19 BT" with 1" aluminum tag marked "2645" bears N77°W, 53.3'.

Geodetic Coordinates (NAD83):

N 44°51'35.0"

W 119°39'06.7"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 16, 2014

Declination: 17' E

Witnesses: Robert Flora, Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018