


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established



Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner point, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

New BTs


A 9 inch diameter P.Pine bears S70°W, 15.9 feet marked X BT

A 13 inch diameter P.Pine bears N58°W, 17.4 feet marked C $\frac{1}{4}$ S23 BT

Set steel fence post approximately 5 feet South with 54-4 sign attached

Corner set June 11, 1984

See map of survey dated June, 1984

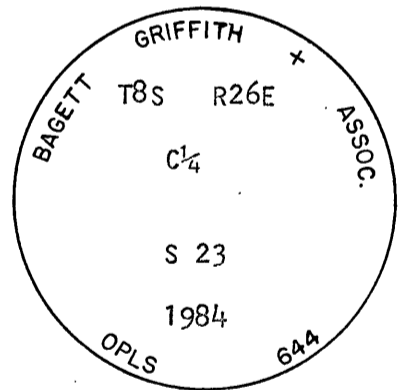

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze.

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon* I hereby certify that the within instrument was filed in this office

for record on the..... *15* day of..... *August*, 19*84*

..... *Robert W. Baggett* by.....
 (COUNTY OFFICIAL) (DEPUTY)