


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner not previously established

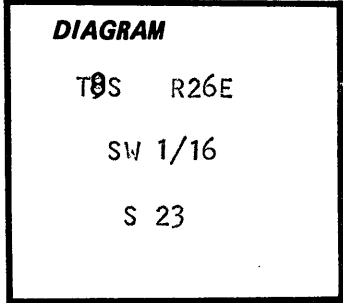

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner point I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New BTs

A 12 inch diameter P.Pine bears S71°W, 36.5 feet marked X BT


A 14 inch diameter P.Pine bears N22°W, 34.3 feet marked SW1/16 S23 BT

Raised mound of stone around monument

Set steel fence posts approximately 5 feet South with 54-2 sign attached and approximately 5 feet East With 54-2 and 54-9 sign attached

Corner set June 9, 1984

See survey dated June, 1984

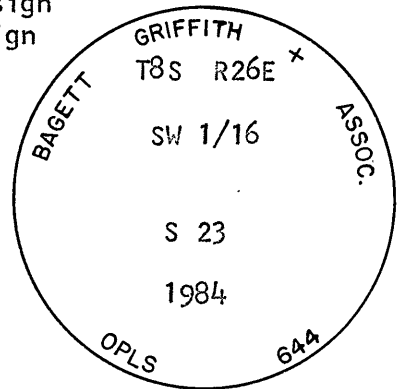

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-9 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze.

Office of.....*Surveyor*..... County of.....*Grant*.....  
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office  
for record on the.....*15* day of.....*August*....., 19.....*84*  
.....*Robert D. Baggett*..... by.....  
(COUNTY OFFICIAL) (DEPUTY)