


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

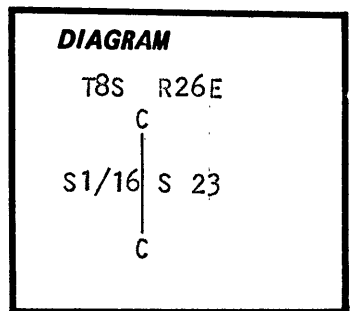

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner point, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which:

New BTs

A 20 inch diameter P. Pine bears N70°E, 43.8 feet marked CS1/16 S23 BT


A 10 inch double bole Juniper bears N32°W, 60.4 feet marked CS1/16 S23 BT

Raised mound of stone around monument

Set steel fence posts approximately 5 feet South with 54-2 sign attached and approximately 5 feet West with 54-2 and 54-9 sign attached

Corner set June 11, 1984

See survey dated June 1984

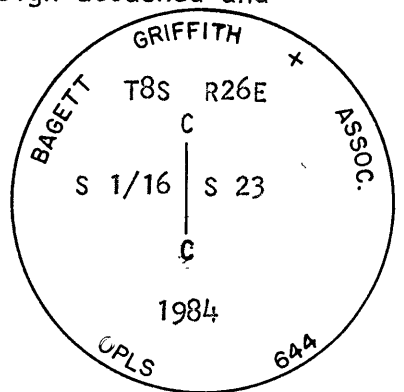

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON JULY 10, 1984 DUANE I. GRIFFITH 644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-9 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze.

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *19* day of *August*, 19 *84*
John R. Deft by _____
(COUNTY OFFICIAL) (DEPUTY)