

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 25 x 10 x 8 ins. for corner to Sections 19, 24, 25, & 30.
Raised stone mound at corner.

R-1

DIAGRAM

T8S
R25E R26E

S24|S19
S25|S30


PLS 2645
2014

Description of corner evidence found:

No original evidence found. Point falls east of rancher's pond. Monument set by single proportion.
See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above ground.

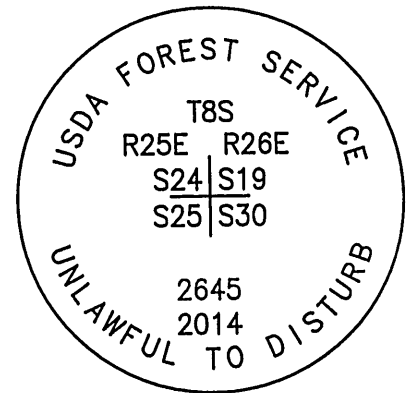

New accessories:

A 17" Juniper scribed "T8S R25E S24 BT" with aluminum tag marked "2645" bears S63°W, 34.8'.
A 16" Juniper scribed "T8S R26E S30 BT" with aluminum tag marked "2645" bears S89°E, 28.8'.
A 21" Juniper scribed "T8S R26E S30 BT" with aluminum tag marked "2645" bears S72°E, 37.2'.
A 1/2" x 30" rebar with 1 1/4" aluminum cap stamped "RM1" bears S61°W, 28.3'.

Geodetic Coordinates (NAD83):

N 44°51'07.2"

W 119°40'18.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 15, 2014

Declination: 17' E

Witnesses: Daniel Lee, Paul Guglielmelli and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018