

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 13 x 10 x 7 ins. for 1/4 Section corner.
Raised stone mound at corner.

R-7

DIAGRAM

T8S R26E
1/4 $\frac{S20}{S29}$


PLS 2645
2014

Description of corner evidence found:

No original evidence found. Area disturbed during road construction. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic was deposited at the base of pipe. Cap is 2 1/2" above the collar of stone.

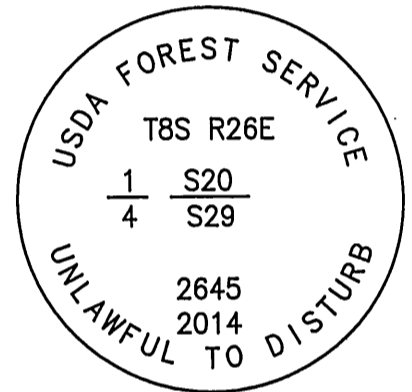

New accessories:

- A 15" Fir scribed "1/4 S20 BT" with 1" aluminum tag marked "2645" bears N62°E, 43.5'.
- A 8" Juniper scribed "1/4 S29 BT" with 1" aluminum tag marked "2645" bears S55°E, 67.2'.
- A 14" Ponderosa Pine scribed "1/4 S29 BT" with 1" aluminum tag marked "2645" bears S67°W, 78.3'.
- A 5" Juniper scribed "1/4 S20 BT" with 1" aluminum tag marked "2645" bears N31°W, 75.2'.

Geodetic Coordinates (NAD83):

N 44°51'10.0"

W 119°38'31.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 28, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018