

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 20 x 14 x 5 ins. for 1/4 Section corner.

From which:

A yellow pine 6 in. in dia. bears N40°E, 37 lks. dist.

A yellow pine 9 in. in dia. bears S45°E, 7 lks. dist.

R-11

### DIAGRAM

T8S R26E  
1/4  $\frac{S21}{S28}$


PLS 2645  
2014

## Description of corner evidence found:

No original evidence found. Area disturbed by logging equipment. Monument set by single proportion. See Record Map of Survey No. 2026

## Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the mound of stone.

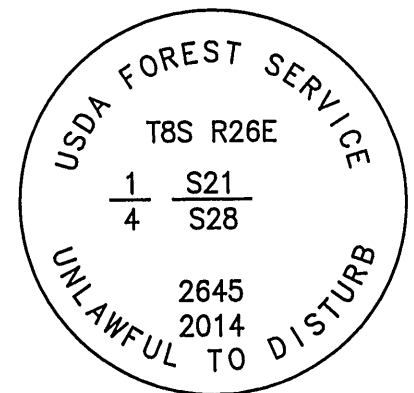

## New accessories:

- A 13" Fir scribed "1/4 S21 BT" with 1" aluminum tag marked "2645" bears N14°E, 42.1'.
- A 15" Ponderosa Pine scribed "1/4 S21 BT" with 1" aluminum tag marked "2645" bears N44°W, 90.1'.
- A 13" Ponderosa Pine scribed "1/4 S28 BT" with 1" aluminum tag marked "2645" bears S78°W, 74.5'.
- A 8" Ponderosa Pine scribed "X" & "BT" with 1" aluminum tag marked "2645" bears S63°E, 27.0'.

## Geodetic Coordinates (NAD83):

N 44°51'08.8"

W 119°37'20.4"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 19, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli and Toribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018