

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 15 x 8 x 6 ins. for 1/4 Section corner. Raised stone mound at corner.

R-23

DIAGRAM


T8S R26E
1/4 $\frac{S24}{S25}$
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Area disturbed when Forest Service Road 181 was constructed. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3 1/4" Aluminum Rock Cap into bedrock 1' below the surface of FS Road 181. Corner falls into west tire track of road. A 2 1/2" PK nail was placed beneath the stem of the cap and a location poster on a metal post placed just west of FS Road 181.

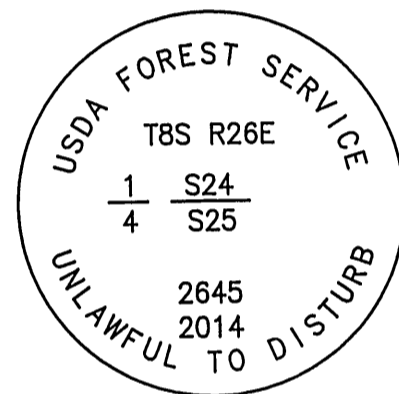

New accessories:

- A 12" Juniper scribed "1/4 S24 BT" with 1" aluminum tag marked "2645" bears N71°W, 37.5'.
- A 12" Double bole Juniper scribed "1/4 S25 BT" with 1" aluminum tag marked "2645" bears S7°W, 51.4'.
- A 9" Juniper scribed "X" & "BT" with 1" aluminum tag marked "2645" bears S24°E, 140.9'.
- A 13" Juniper scribed "1/4 S24 BT" with 1" aluminum tag marked "2645" bears N19°W, 158.3'.

Geodetic Coordinates (NAD83):

N 44°51'08.9"
W 119°33'48.7"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 5, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Robert Flora, and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018