

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 14 x 12 x 10 ins. for cor. to Secs24, 25, 19, & 30.
Raised stone mound at corner.

R-25

DIAGRAM

T8S	
R26E	R27E
S24	S19
S25	S30

PLS 2645
2014

Description of corner evidence found:


Found pieces of a broken stone in a 3 1/2' diameter mound of stone. Largest piece had an "8" marked on the east face.

A Forest Service Location poster set by PLS 1635 on 5-2-1996 was located on a Juniper that bears N76°W , 32.0' from the corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2 1/2" diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 4" above the mound of stone. Original stone pieces are buried along south side of pipe.

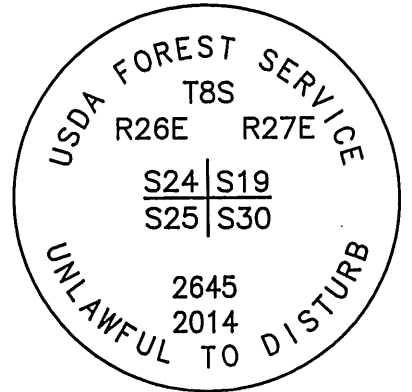

New accessories:

A 1/2" x 30' rebar with 1 1/2" Aluminum cap marked "RM1" bears S34°W, 36.2'.

A 1/2" x 30' rebar with 1 1/2" Aluminum cap marked "RM2" bears N50°E, 26.7'.

A 9" Double Bole Juniper scribed "T8S R27E S30 BT" with 1" aluminum tag marked "2645" bears S58°E, 48.75'.

A 13" Juniper scribed "T8S R27E S24 BT" with 1" aluminum tag marked "2645" bears N76°W, 32.0'.

Geodetic Coordinates (NAD83):

N 44°50'18.5"

W 119°33'11.8"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: July 30, 2014

Declination: 17° E

Witnesses: Carl Stout, Paul Guglielmelli, Robert Flora, Lucas Beauchamp, and Toribio Quinones

