

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

S-7

DIAGRAM


N 1/16 | S29
C
C
PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown. A magnet in a clear plastic case was deposited at the deposited at the base of pipe. Cap is 2" above ground.

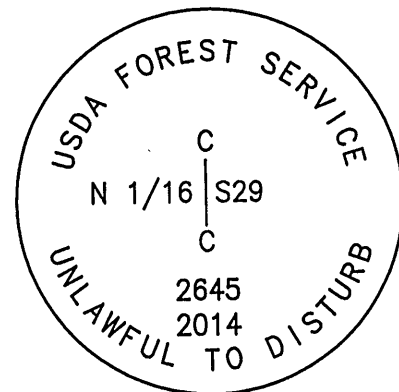

New accessories:

A 18" Douglas Fir scribed "CN 1/16 S29 BT" with an aluminum tag marked "2645" bears S84°E, 36.9'.
A 13" Douglas Fir scribed "CN 1/16 S29 BT" with an aluminum tag marked "2645" bears South, 11.8'.

Geodetic Coordinates (NAD83):

N 44°50'56.1"
W 119°38'31.3"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: September 2, 2014

Declination: 15° E

Witnesses: Lisa Adair and Daniel Lee.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018