

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

S-9

DIAGRAM


N 1/16
S29 | S28
PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 3' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 4" above the collar of stone.

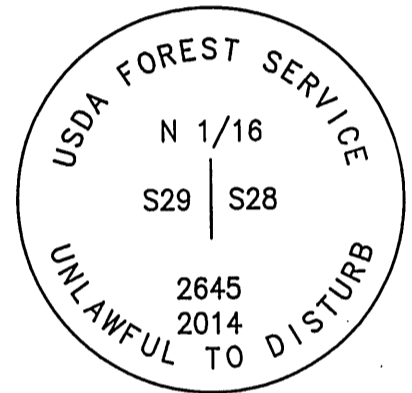

New accessories:

A 15" Juniper scribed "1/16 S28 BT" with a aluminum tag marked "2645" bears S26°E, 58.8'.
A 12" Juniper scribed "1/64 S29 BT" with a aluminum tag marked "2645" bears S58°W, 46.5'.

Geodetic Coordinates (NAD83):


N 44°50'56.4"
W 119°37'55.4"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 19, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli and Torribio Quinones



EXPIRES 12-31-2018