

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established. Corner established during Grant County
See Record Map of Survey No. 2026

T-6

DIAGRAM

W 1/16

C — C
S29


PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above collar of stone.

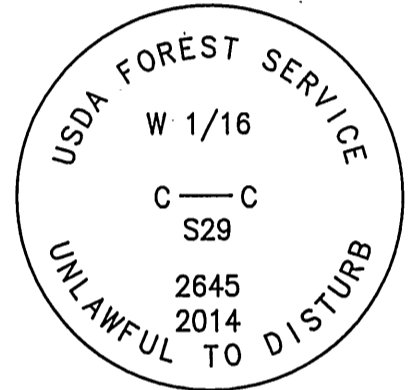

New accessories:

A 10" Juniper scribed "1/16 S29 BT" with an aluminum tag marked "2645" bears N76°W, 60.9'.
A 12" Ponderosa Pine scribed "1/16 S29 BT" with an aluminum tag marked "2645" bears S45°E, 45.0'.

Geodetic Coordinates (NAD83):

N 44°50'42.7"

W 119°38'48.3"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 19, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli and Torribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018