

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 18 x 16 x 8 ins. for 1/4 Section corner.  
A yellow Pine 26 in. in dia. bears S65°W 50 liks. dist.

T-9

DIAGRAM




Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3 1/4" aluminum rock cap marked as shown.  
A 2 1/2" "PK" nail was placed in the drilled hole under the stem of the rock cap.

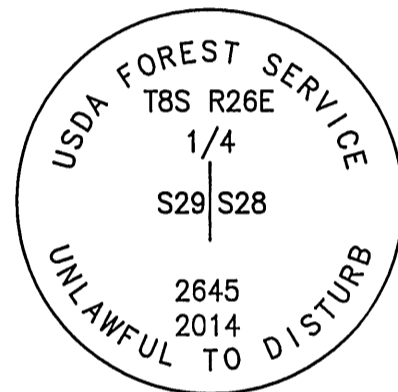

New accessories:

- A 5" Juniper scribed "X BT" with 1" aluminum tag marked "2645" bears N82°E, 33.4'.
- A 9" Juniper scribed "1/4 S28 BT" with 1" aluminum tag marked "2645" bears N42°E, 45.9'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM1" bears S60°W, 23.9'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM2" bears S43°E, 36.8'.

Geodetic Coordinates (NAD83):

N 44°50'42.4"  
W 119°37'54.9"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 14, 2014

Declination: 17° E

Witnesses: Robert Flora, Paul Guglielmelli, Daniel Lee and Toribio Quinones

