

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 14 x 8 x 6 ins. for 1/4 Section corner. Raised stone mound at corner.

T-21

### DIAGRAM

T8S R26E

1/4

S26 | S25

PLS 2645

2014


## Description of corner evidence found:

Found a 20" x 10" x 8" stone, set cardinal in a mound of stone with faint illegible chisel marks on east face.

## Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

A mag nail with 1" aluminum tag marked "2645" was epoxied into the top of the original stone. The stone mound was built up 2' in diameter around the base. The original stone was not disturbed.

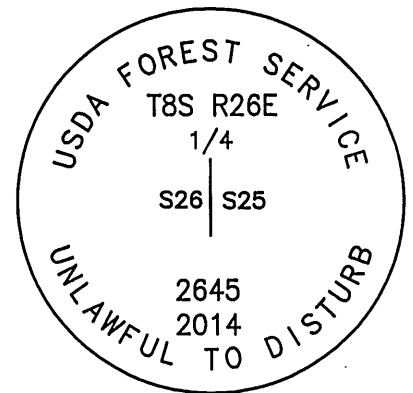

## New accessories:

The corner falls on private lands and no bearing trees were taken.

A 1/2" x 30" rebar with an aluminum cap stamped RM1 bears N34°43"E, 21.8'

A 1/2" x 30" rebar with an aluminum cap stamped RM2 bears S48°E, 18.8'

## Geodetic Coordinates (NAD83):

N 44°50'42.7"


W 119°34'23.3"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 3, 2014

Bearings to accessories are Geodetic.

Witnesses: Daniel Lee, Lisa Adair, Lucas Beauchamp, and Toribio Quinones

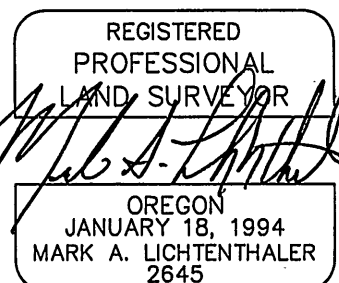

EXPIRES 12-31-2018