


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

U-7

DIAGRAM




Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in 3' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe.

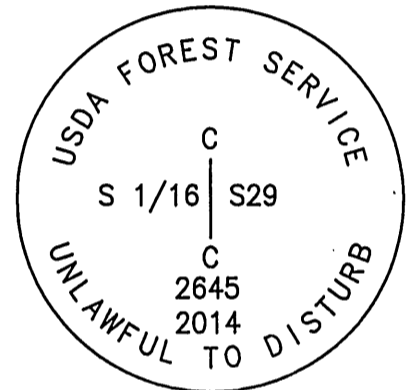

New accessories:

A 11" Juniper scribed "1/16 S29 BT" with aluminum tag marked "2645" bears S8°W, 11.1'.
A 1/2" x 24" rebar with aluminum cap marked "RM1" bears N82°W, 17.7'.

Geodetic Coordinates (NAD83):

N 44°50'29.1"
W 119°38'30.3"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 19, 2014

Declination: 17° E

Witnesses: Daniel Lee and Robert Flora

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018