

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 7 x 6 ins. for 1/4 Section corner.
Raised a stone mound at corner.

V-11

DIAGRAM


T8S R26E
1/4 $\frac{S28}{S33}$
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Monument set by single proportion.
See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the collar of stone.

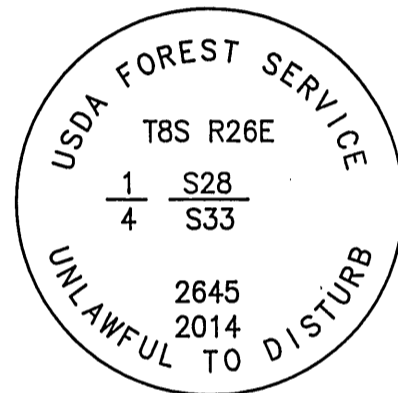

New accessories:

- A 14" Juniper scribed "1/4 S33 BT" with 1" aluminum tag marked "2645" bears S61°W, 47.3'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM1" bears N31°W, 38.7'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM2" bears N17°E, 28.9'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM3" bears S30°E, 18.5'.

Geodetic Coordinates (NAD83):

N 44°50'15.8"
W 119°37'19.9"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 13, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli and Toribio Quinones

