


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established. See Record Map of Survey No. 2026

W-10




Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a mound of stone. A magnet in a clear plastic case was deposited at the base of pipe.

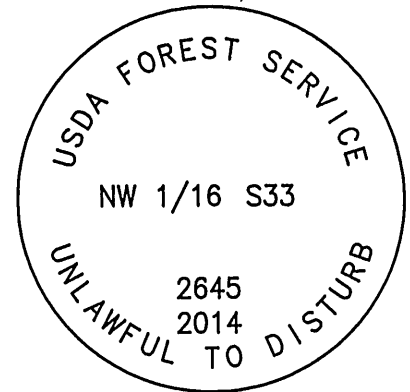

New accessories:

- A 1/2" x 24" rebar with aluminum cap marked "RM1" bears N28°E, 21.4'.
- A 1/2" x 24" rebar with aluminum cap marked "RM2" bears S72°E, 33.9'.

Geodetic Coordinates (NAD83):

N 44°50'02.8"
W 119°37'37.4"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 13, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli and Torribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018