

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 15 x 10 x 5 ins. for 1/4 Section corner. Raised stone mound at corner.

X-9

DIAGRAM


T8S R26E
1/4
S32 | S33
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe.

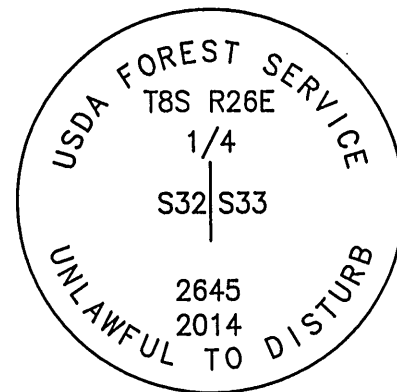

New accessories:

- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM1" bears N64°E, 30.3'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM2" bears N43°W, 45.55'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM11" bears S63°W, 38.6'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM12" bears S8°E, 31.9'.

Geodetic Coordinates (NAD83):

N 44°49'50.1"
W 119°37'55.0"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 7, 2014

Declination: 17' E

Witnesses: Paul Guglielmelli, Robert Flora and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Mark A. Lichtenthaler
OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018