

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 18 x 14 x 8 ins. for 1/4 Section corner. Raised stone mound at corner.

X-21

DIAGRAM


T8S R26E
1/4
S35 | S36
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 5' dia x 2' high mound of stone, . A magnet in a clear plastic case was deposited at the base of pipe.

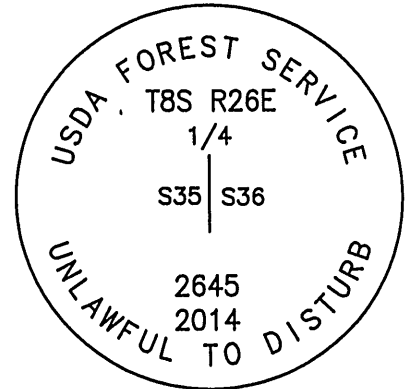

New accessories:

- A 12" Juniper scribed "1/4 S35 BT" with aluminum washer marked "2645" bears N89°W, 26.21'.
- A 14" Juniper scribed "1/4 S36 BT" with aluminum washer marked "2645" bears S30°E, 51.75'.
- A 8" Juniper scribed "X BT" with aluminum washer marked "2645" bears S58°W, 49.70'.
- A 1/2" x 24" rebar with red plastic cap stamped "Umatilla NF" bears N54°W, 27.40'.

Geodetic Coordinates (NAD83):

N 44°49'50.4"
W 119°34'20.7"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: July 21, 2014

Declination: 17'

Witnesses: Paul Guglielmelli, Daniel Lee, Lisa Adair, Lucas Beauchamp, and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018