


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Z-15

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated June 20, 1877. Surveyor General records state:

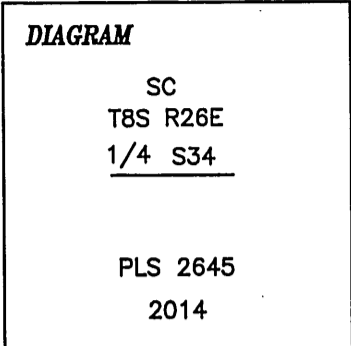

Set stone 12 x 10 x 5 ins. for 1/4 Section corner.

From which:

A yellow pine 16" diameter bears N2°E 37 lks dist.

A yellow pine 10" diameter bears S25°W 22 lks dist.

Description of corner evidence found:


Found a 11" x 9" x 5" stone leaning to the north and marked "1/".

From which a decaying ponderosa pine stump with remnants of a possible blaze, bears S10°W, 14.5'.

Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Original stone is buried along north side of pipe.

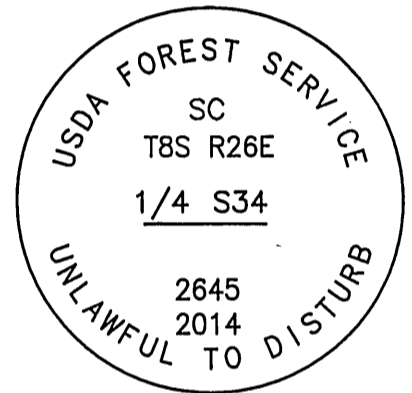

New accessories:

A 6" Juniper scribed "1/4 S34 SC BT" with aluminum tag marked "2645" bears N27°E, 23.6'.

A 8" Juniper scribed "X" & "BT" with aluminum tag marked "2645" bears N15°W, 9.2'.

Geodetic Coordinates (NAD83):

N 44°49'26.3"

W 119°36'09.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 5, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Robert Flora, Carl Stout, and Toribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018