


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 24x12x8 for standard cor to Secs 34 and 35

Raised stone mound at Cor

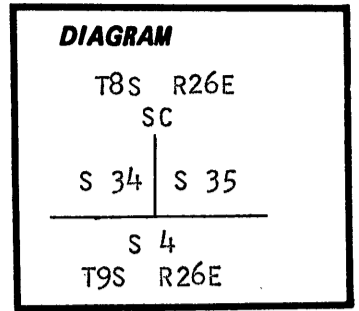

Description of corner evidence found:

Found stone 23x9x7 with 4 grooves and 2 grooves in mound of stone

Description of monument and accessories established to perpetuate the

original location of this corner: In place of stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 24 inches in the ground from which:

New BTs

A 9 inch diameter Juniper bears N35°E, 70.5 feet, marked T8S R26E S35 SC BT

A 12 inch diameter Juniper bears N17°W, 150.9 feet marked T8S R26E S34 SC BT

Raised mound of stone around monument


Buried original stone East and alongside of monument

Set steel fence post approximately 5 feet West of monument with 54-4 sign attached

Corner set May 23, 1984

Witness: Rick Robinson

See map of survey dated June, 1984

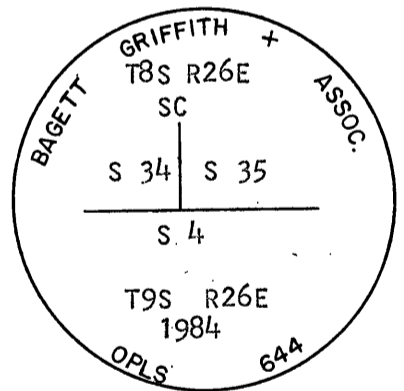

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon*, I hereby certify that the within instrument was filed in this office for record on the... *15* ... day of... *August*, 19... *84*

..... *Duane I. Griffith* by
(COUNTY OFFICIAL) (DEPUTY)