


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: F.W. Campbell, Deputy Surveyor, under Contract No. 380, dated March 19, 1881.

Surveyor General Record States: Set a basalt stone 22x10x7 with pits for corner to sections 3,4,9 and 10.

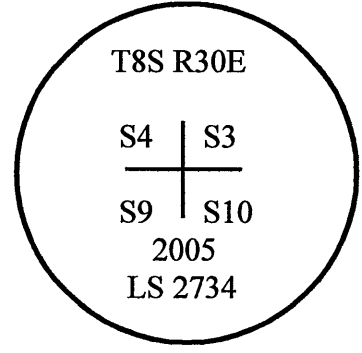

Description of corner evidence found:

No evidence of the original corner monument was found. The GLO notes call the top of the hill at 2.00 chs north and 1.17 chs N89°41'W of the section corner. The top of the hill is well defined in this area and there is only one place that these two calls will fit. These two topographic calls are the best evidence of the original position of this section corner.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jack L. Watson
OREGON
SEPTEMBER 19, 1995
JACK L. WATSON
2734
RENEWAL DATE: 6/30/2006

See Map of Survey No. 1736

Description of monument and accessories set at corner location:

At the intersection of the GLO topographic calls north 2.00 chs to the top of the hill and N89°41'W 1.17 chs to the top of the hill, I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 20 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

- A 17" juniper bears S47°E, 109.2 ft. marked T8SR30ES10BT
- A 15" juniper bears S68°W, 83.5 ft. marked T8SR30ES9BT
- A 14" juniper bears N17°W, 50.2 ft. marked T8SR30ES4BT
- A 5/8"x24" iron pin bears N66°E, 12.60 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: June 22, 2005

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 5 day of JUNE, 2005.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)