

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-1  
~~J-25~~


History of original corner establishment:

1883, FRANK W. CAMPBELL, UNDER CONTRACT NO. 468, ESTABLISHED THE CORNER. HE SET A BASALT STONE 16" BY 13" BY 6" HIGH, 11" IN THE GROUND, FROM WHICH:

- 10" PINE, N. 20° E., 48 LINKS.
- 10" PINE, S. 52° E., 31 LINKS.
- 10" PINE, S. 45° W., 60 LINKS.
- 18" TAMARACK, N. 74° W., 16 LINKS.

1992, DAVID A. SCHLAICH, RLS 2308, FOUND A STONE, 13" X 13" X 5", 11" IN THE GROUND WITH 4 NOTCHES ON THE SOUTH EDGE. HE REPLACED THE STONE WITH A 2 1/2" BY 30" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, SET 24" IN THE GROUND AND SURROUNDED IT WITH A MOUND OF STONE (BURIED CORNER STONE UPSIDE DOWN ON NORTH SIDE OF THE MONUMENT), FROM WHICH:

- 9" WINDTHROWN LODGEPOLE PINE SNAG, N. 21° E., 31.7 FEET, ILLEGIBLE SCRIBING VISIBLE ON PARTIALLY HEALED BLAZE.
  - 11" WINDTHROWN LODGEPOLE PINE SNAG, S. 51° E., 20.5 FEET, ILLEGIBLE SCRIBING VISIBLE ON PARTIALLY HEALED BLAZE.
  - 11" WINDTHROWN LODGEPOLE PINE SNAG, S. 47° W., 39.6 FEET, LYING ON IT'S BLAZE.
  - 21" WESTERN LARCH, N. 69° W., 11.1 FEET, WITH HEALED BLAZE.
- MARKED NEW BT'S:
- 5" WESTERN LARCH, N. 51° E., 48.9 FEET.
  - 12" WESTERN LARCH, S. 23 1/2° E., 24.4 FEET.
  - 15" WESTERN LARCH, S. 73° W., 44.4 FEET.

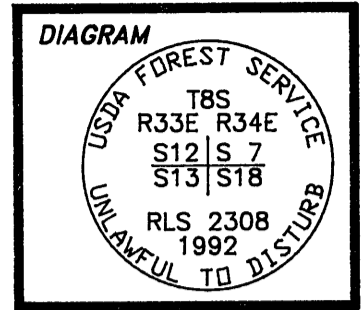

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, PROJECTING 6" OUT OF THE GROUND AND SURROUNDED BY A STONE MOUND, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

- 9" WINDTHROWN LODGEPOLE PINE SNAG, N. 21° E., 31.7 FEET, WITH ILLEGIBLE SCRIBING VISIBLE ON A PARTIALLY HEALED BLAZE (ORIGINAL BT).
- 5" WESTERN LARCH, N. 51° E., 48.9 FEET, SCRIBING "T8S R34E S7" BT" VISIBLE ON DOUBLE BLAZE (1992 BT).
- 11" WINDTHROWN LODGEPOLE PINE SNAG, S. 51° E., 20.5 FEET, WITH ILLEGIBLE SCRIBING VISIBLE ON A PARTIALLY HEALED BLAZE (ORIGINAL BT).
- 12" WESTERN LARCH, S. 23 1/2° E., 24.4 FEET, SCRIBING "T8S R34E S18" BT" VISIBLE ON DOUBLE BLAZE (1992 BT).
- 11" WINDTHROWN LODGEPOLE PINE SNAG, S. 47° W., 39.6 FEET (ORIGINAL BT).
- 15" WESTERN LARCH, S. 73° W., 44.4 FEET, SCRIBING "T8S R33E S13" BT" VISIBLE ON DOUBLE BLAZE (1992 BT).
- 21" WESTERN LARCH, N. 69° W., 11.1 FEET, WITH HEALED BLAZE (ORIGINAL BT).

THE 1992 BT'S HAVE A 3/4" BRASS WASHER STAMPED "RLS 2308" NAILED TO THE LOWER BLAZE BETWEEN THE "BT" SCRIBING.

Description of monument and accessories I established to perpetuate the original location of this corner:

NAD83(1991)  
LATITUDE: 44°52'52.42714" NORTH  
LONGITUDE: 118°40'35.12821" WEST

MAGNETIC DECLINATION: 20° EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH  
DATE: JULY, 1995

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David A. Schlaich*

OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWS 06/30/96

Office of..... SURVEYOR ..... County of..... Grant .....

State of..... OREGON ....., I hereby certify that the within instrument was filed in this office for record on the..... 6 day of..... OCT ....., 19..... 95 .....

..... Robert D. Bayart ..... by..... .....  
(COUNTY OFFICIAL) (DEPUTY)