

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-05

History of original corner establishment:


1884, HERMAN D. GRADON, UNDER CONTRACT NO. 499, ESTABLISHED THE CORNER. HE SET A BASALT STONE 14" BY 10" BY 6" HIGH, 9" IN THE GROUND, FROM WHICH:

- 15" FIR, N. 40° E., 20 LINKS.
- 24" FIR, S. 47° E., 59 LINKS.
- 13" FIR, S. 77° W., 36 LINKS.
- 22" FIR, N. 80° W., 54 LINKS.

1993, DAVID A. SCHLAICH, RLS 2308, FOUND A BROKEN BASALT STONE, APPROXIMATE SIZE 14" BY 10" BY 6", WITH NO MARKS. HE REPLACED THE STONE WITH A 2 1/2" BY 30" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, SET 16" IN THE GROUND AND PLACED A 2' BY 1' HIGH ROCK MOUND AROUND THE CAP, WITH BROKEN BASALT STONE PLACED AT THE BOTTOM OF THE MOUND, FROM WHICH:

- 36" DOUGLAS FIR SNAG, S. 43 1/2° E., 38.9 FEET, WITH HEALED BLAZE.
- 31" DOUGLAS FIR SNAG, S. 80 1/4° W., 23.8 FEET, NO MARKS VISIBLE.
- 32" DOUGLAS FIR, N. 77° W., 35.6 FEET, WITH HEALED DOUBLE BLAZE.

- ROOT HOLE, N. 40° E., 14.2 FEET.
- MARKED NEW BT'S:
- 45" WESTERN LARCH, N. 55 1/2° E., 33.8 FEET.
- 10" ENGLEMANN SPRUCE, S. 22 3/4° E., 9.5 FEET.
- 10" LODGEPOLE PINE, S. 31 1/2° W., 28.0 FEET.

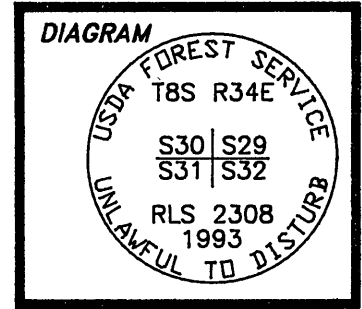

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, PROJECTING 14" OUT OF THE GROUND AND SURROUNDED BY A STONE MOUND, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

- 45" WESTERN LARCH, N. 55 1/2° E., 33.8 FEET, SCRIBING "T8S R34E S29" BT" VISIBLE ON A DOUBLE BLAZE (1993 BT).
- 36" DOUGLAS FIR SNAG, S. 43 1/2° E., 38.9 FEET, WITH HEALED BLAZE (ORIGINAL BT).
- 10" ENGLEMANN SPRUCE, S. 22 3/4° E., 9.5 FEET, SCRIBING "T8S R34E S32" BT" VISIBLE ON A DOUBLE BLAZE (1993 BT).
- 10" LODGEPOLE PINE, S. 31 1/2° W., 28.0 FEET, SCRIBING "T8S R34E S31" BT" VISIBLE ON A DOUBLE BLAZE (1993 BT).
- 31" DOUGLAS FIR SNAG, S. 80 1/4° W., 23.8 FEET, WITH NO MARKS VISIBLE (ORIGINAL BT).
- 32" DOUGLAS FIR, N. 77° W., 35.6 FEET, WITH HEALED DOUBLE BLAZE (ORIGINAL BT).

THE 1993 BT'S HAVE A 3/4" BRASS WASHER STAMPED "RLS 2308" NAILED TO THE LOWER BLAZE BETWEEN THE "BT" SCRIBING.

Description of monument and accessories I established to perpetuate the original location of this corner:

NAD83(1991)
LATITUDE: 44°50'13.95723" NORTH
LONGITUDE: 118°39'25.09627" WEST

MAGNETIC DECLINATION: 20° EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH
DATE: JULY, 1995

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David A. Schlaich

OREGON
JULY 16, 1987
DAVID A. SCHLAICH
2308

RENEWS 06/30/96

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 6 day of Oct, 1995
Robert D. Baxter by.....
 (COUNTY OFFICIAL) (DEPUTY)