


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

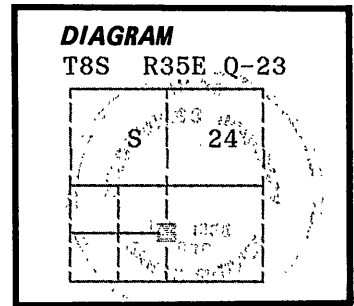

No record of subsequent monumentation found in Grant County survey records.
Description of corner evidence found:

NONE

See map of survey dated September, 1987. *NO. 1019*

Description of monument and accessories established to perpetuate the

original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which;

New Bearing Trees:


- A 16 inch diameter Western Larch bears S4°E, 55.35 feet marked CS1/16 S24 BT
- A 12 inch diameter Lodgepole Pine bears S83°W, 45.59 feet marked CS1/16 S24 BT

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-2 and 54-9 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 25, 1987.

Witnesses: Greg Blackman and Jeff Petersen

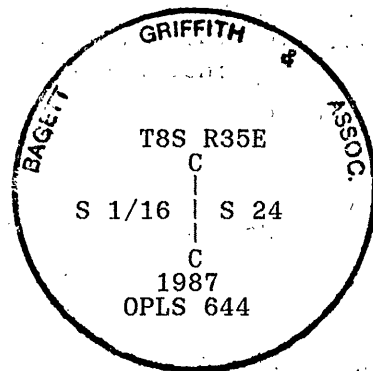

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *22* day of *Oct*, 19*87*
Robert D. Buzart by _____
(COUNTY OFFICIAL) (DEPUTY)