


R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Herman D. Gradon contract No. 499, 1884, states: Set a post 3' long 3" sqr. 24" in the ground for 1/4 Sec. Cor.  
From which:

- A Pine 6" dia. bears N 7°E 20 lks. dist. marked 1/4 S BT.
- A Pine 8" dia. bears S 45°W 22 lks. dist. marked 1/4 S BT.

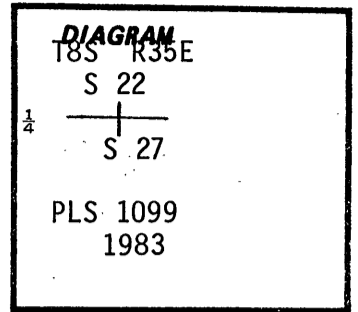

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner position determined by survey, we set a 2 1/2"x30" galvanized iron pipe 24" in the ground with brass cap attached stamped:

From Which:

- A Douglas Fir 8" dia. bears N 36°E 49.6 ft. scribed 1/4 S22 BT.
  - A Ponderosa Pine 14" dia. bears S 65 1/2°E 89.0 ft. scribed 1/4 S27 BT.
- Attached brass washer stamped LS 1099 to lower blaze of both BT's.

T8S R35E  
S22

1/4 ———  
S27

PLS 1099  
1983

Corner located and perpetuated in accordance with Umatilla National Forest Survey Contract No. 53-04R3-2-01275.

Corner located in open timber in an old logged area.

Staff Compass (20° East Declination) and Steel Tape.

July 28, 1983

Witnesses: Glen Wagoner  
Greg Orton  
Kyle McKinney

Refer to Grant County Survey No. 828



Office of SURVEYOR County of GRANT  
State of OREGON, I hereby certify that the within instrument was filed in this office  
for record on the 30 day of AUG, 1984  
Robert O. Langlitz by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)