


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by Herman D. Gradon under GLO contract number 499, dated March 11, 1884. Surveyor General record states:

Set a post 4 ft long 4 ins square 24 ins in ground for cor to secs 23, 24, 25 and 26 marked T8S S24 on NE, R35E S25 on SE, S26 on SW and S23 on NW faces with 2 notches on S and 1 notch on E edges from which;  
 A Pine 10 ins dia brs N53°E, 55 lks dist marked T8S R35E S24 BT  
 A Pine 10 ins dia brs S22°E, 92 lks dist marked T8S R35E S25 BT  
 A Fir 36 ins dia brs S63°W, 34 lks dist marked T8S R35E S26 BT  
 A Fir 22 ins dia brs N33°W, 40 lks dist marked T8S R35E S23 BT

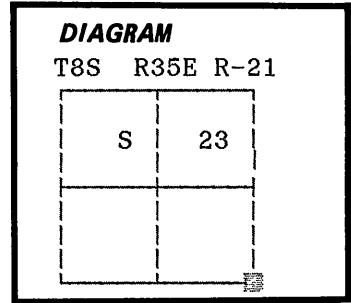

No record of subsequent monumentation found in Grant County survey records.  
**Description of corner evidence found:**

**Original Bearing Trees:**  
 Found a Douglas Fir stump hole from a large tree, S63°W, 34 lks  
 Found a 26" diameter Douglas Fir stump N33°W, 40 lks

Corner position is harmonious with the creek call to the East and is within 10 ft. of the proportionate position.

See map of survey dated September, 1987. *No, 1019*  
**Description of monument and accessories established to perpetuate the original location of this corner:**

At record bearing and distance from the above described bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which;

**New Bearing Trees:**  
 A 14 inch diameter Ponderosa Pine bears N88°E, 66.15 feet marked T8S R35E S24 BT  
 A 16 inch diameter Western Larch bears S22°E, 73.42 feet marked T8S R35E S25 BT  
 A 10 inch diameter Western Larch bears S51°W, 179.11 feet marked T8S R35E S26 BT  
 A 6 inch diameter Western Larch bears N50°W, 42.80 feet marked S23 BT


Raised a mound of stone around monument, 3 ft. base to top of cap.

I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 13, 1987.

Witnesses: Greg Blackman and Rick Robinson

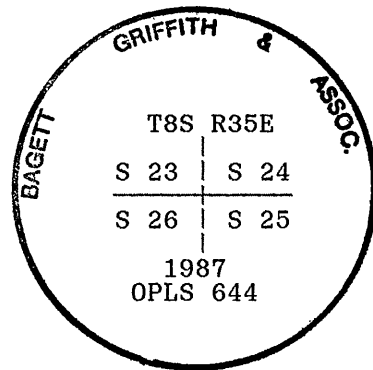

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... *Seaside* ..... County of..... *Grant* .....  
 State of..... *Oregon* ....., I hereby certify that the within instrument was filed in this office for record on the..... *22* ..... day of..... *Oct* ....., 19..... *87* .....  
*Robert D. [Signature]* by .....  
 (COUNTY OFFICIAL) (DEPUTY)