

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by Herman D. Gradon under GLO contract number 499, dated March 11, 1884. Surveyor General record states:

Set a post 3 ft long 3 ins square 24 ins in ground for 1/4 sec cor, marked 1/4 on N face, from which:

- A Tamarack 16 ins dia brs N48°W, 42 lks dist marked 1/4 S BT
- A Tamarack 20 ins dia brs S52°W, 13 lks dist marked 1/4 S BT

Corner remonumented in September, 1979 by William L. Hanley. His notes state: Found a tamarack 18 ins diam with full scribes for Section 25 BT. The decomposed remains of a tree with distinguishable blaze for section 24 BT. At the record location as determined by the bearing trees found the rotted remains of a wood post to a depth of 20 ins. Set a 2 1/2" brass cap in 2" iron pipe 31" long 27" in ground with a surrounding rock mound. Brass cap marked (markings shown below). New bearing trees:



- A pine 12 ins diam bears N42°E, 13.7 ft dist mkd 1/4 S24 BT.
- A pine 8 ins diam bears S19°E, 14.3 ft dist mkd 1/4 S25 BT.

No record of subsequent monumentation found in Grant County survey records.

**Description of corner evidence found:**

Found a 2 inch brass cap on a 1 inch galvanized iron pipe in a mound of stone, with brass cap marked:

- Hanley Bearing Trees:**  
 Found a 14" diameter Ponderosa Pine N42°E, 13.7 feet, Live and vigorous with scribes visible.  
 Found a 10" diameter Douglas Fir S19°E, 14.3 feet, sickly with scribes visible.  
**Original Bearing Tree:**  
 Found a 24" diameter Tamarack S52°W, 13 lks, dead and down on face.

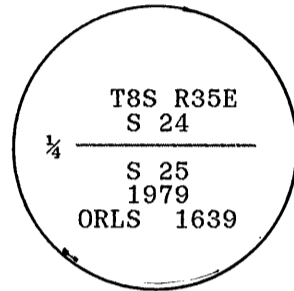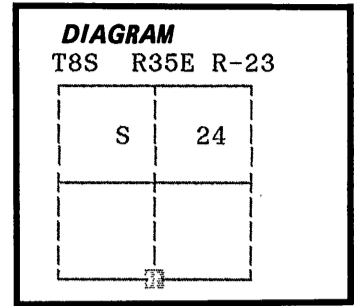

See map of survey dated September, 1987. *No. 1019*

**Description of monument and accessories established to perpetuate the original location of this corner:**

From the above described brass cap monument:

- New BT:**  
A 12 inch diameter Ponderosa Pine bears S66°E, 68.65 feet marked 1/4 S25 BT
- Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet West with 54-2 and 54-9 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 9, 1987.



I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... *Surveyor* ..... County of..... *Grant* .....  
 State of..... *Oregon* ....., I hereby certify that the within instrument was filed in this office  
 for record on the *27* day of *Oct* ....., 19*87*  
*Robert D. Dwyer* ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)