


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

S-17

**History of original corner establishment:**

Corner established by Gary L. Langlitz, PLS 1099, Grant County Survey No. 828. Record states: At corner position determined by survey we set a 2 1/2"x30" galvanized iron pipe 26" in the ground attached brass cap stamped: (see corner diagram) From which:

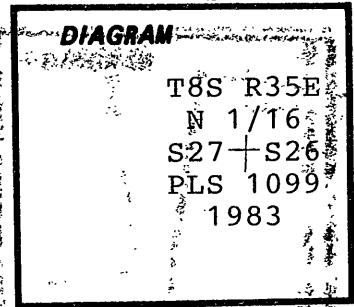

A Western Larch 8" dia. bears S64°E 31.5 ft. scribed N 1/16 S 26 BT.

A Ponderosa Pine 8" dia. bears S64°W 24.2 ft. scribed N 1/16 S 27 BT.

Attached brass washer stamped "LS 1099" to foot blaze of both BT's.

**Description of corner evidence found:**

A 2 1/2" brass cap on a 2 1/2" galvanized iron pipe projecting 4" from a small rock mound, steel fence post 5' south with burned signs 54-2 and 54-9. 1983 Bearing Tree:

An 8" diameter ponderosa pine, dead, lying on ground, bears S 64° W, 24.25 feet with burned signs still attached.

**Description of monument and accessories established to perpetuate the original location of this corner:**

**Corner perpetuation:**

Improved the surrounding mound and attached signs 54-4 and 54-9 to existing steel fence post on found monument.

**New Bearing Trees:**

A 9" diameter ponderosa pine bears S 18° E, 103.0 feet marked "N1/16S26BT". A 10" diameter ponderosa pine bears S 41 1/2° W, 89.0 feet marked "N1/16S27BT".

Each new bearing tree has signs 54-3 and 54-9 attached below a 6" band of red paint. Each blaze painted with red paint and brass washer stamped "PLS 1106" attached.

Compass declination 18° East.

Witnessed by: William L. Hanley, PLS  
Kelly Snively

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1987  
WILLIAM R. WELLS  
1106

Renews 6/30/98

Office of SURVEYOR County of GRANT  
State of OREGON hereby certify that the within instrument was filed in this office  
for record on the 18 day of DEC, 1986  
Robert D. Smith by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)