


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally established by Gary L. Langlitz, Registered Land Surveyor No. 1099, on September 6, 1983 (Grant County Map Survey No. 828).

As the corner position fell in a slide, Langlitz set a 2 1/2" X 30" galv. iron pipe with brass cap, 25" in the ground, 70 feet N. 88-48-02 E. as a Witness Corner in raised mound of stone, from which;
A ponderosa pine 6 ins. diam., bears N 5 W, 42.0 ft., mkd. "X BT".
A ponderosa pine 10 ins. diam., bears N 74 E, 44.0 ft., mkd. "X BT".

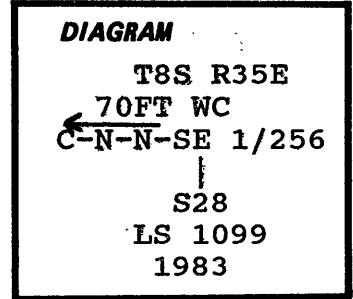

Attached brass washers stamped LS 1099 to BT blaze on both trees.

Description of corner evidence found:

Found a 2 1/2" iron pipe, with brass cap, projecting 5" out of ground, from which;

A 9" ponderosa pine, bears N 4 W, 41.4 ft., scribed "X BT" on double blaze, with brass washer mkd. "LS 1099" nailed next to "BT" scribing (record N 5 W, 42.0 ft.).
A 13" ponderosa pine, bears N 73 1/2 E, 74.2 ft., scribed "X BT" on double blaze with brass washer "LS 1099" nailed next to "BT" scribing (record N 74 E, 44.0 ft.).

Description of monument and accessories | established to perpetuate the original location of this corner:

Magnetic Declination: 20 degrees East.

Work performed by: David A. Schlaich (RLS 2308)
Witnessed by: Darron Trowbridge
Date: August 27, 1992



EXPIRES 12/31/94

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 4 day of June, 1993
Robert D. Hayes by _____
(COUNTY OFFICIAL) (DEPUTY)