


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T-19

History of original corner establishment:

None, corner established by this survey.

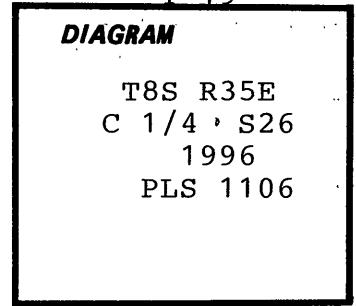

Description of corner evidence found:

None.

Description of monument and accessories | established to perpetuate the original location of this corner:

At position established by survey set a 2 1/2" diameter aluminum pipe 30" long with 2 1/2" aluminum cap, flush with ground surface, marked as shown in corner diagram.

Set steel fence post alongside with signs 54-2 and 54-9 attached.

New Accessories:

An 8" diameter lodgepole pine bears N 69° E, 24.8 feet marked "C1/4S26BT" on double blaze.

A 10" diameter lodgepole pine bears S 74 1/2° E, 11.3 feet marked "C1/4S26BT" on double blaze.

An 8" diameter western larch bears S 67 1/4° W, 13.8 feet marked "C1/4S26BT" on double blaze.

An 8" diameter lodgepole pine bears N 37 3/4° W, 17.7 feet marked "C1/4S26BT" on double blaze.

All bearing trees have signs 54-3 and 54-9 attached below a 6" band of red paint. Each blaze painted red with a brass washer stamped "PLS 1106" attached.

Compass declination 18° East.

Witnessed by: William L. Hanley, PLS
Kelly Snively

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Renews 6/30/98

Office of... SURVEYOR County of... GRANT
 State of... OREGON, I hereby certify that the within instrument was filed in this office
 for record on the... 18 day of... DEC, 19... 96
Robert D. Baggett by
 (COUNTY OFFICIAL) (DEPUTY)