


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

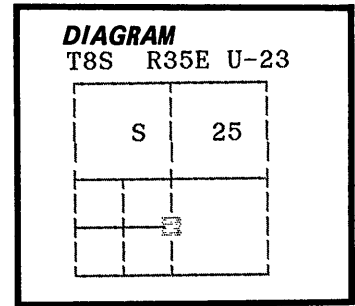

No record of subsequent monumentation found in Grant County survey records.
Description of corner evidence found:

NONE

See map of survey dated September, 1987. *N6.1019*
Description of monument and accessories I established to perpetuate the

original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground, from which;

New Bearing Trees:
A 14 inch diameter Ponderosa Pine bears N66°E, 48.71 feet marked CS1/16 S25 BT
A 15 inch diameter Ponderosa Pine bears N37°W, 48.91 feet marked X BT


Raised a mound of stone around monument, 4 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet East with 54-2 and 54-9 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 27, 1987.

Witnesses: Greg Blackman and Jeff Petersen

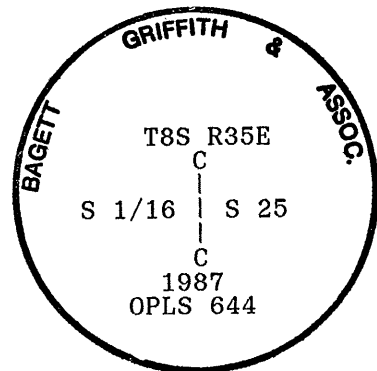

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *27* day of... *Oct* ... 19... *87* ...
... *Rolau F. Baggett* by ...
(COUNTY OFFICIAL) (DEPUTY)