


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None

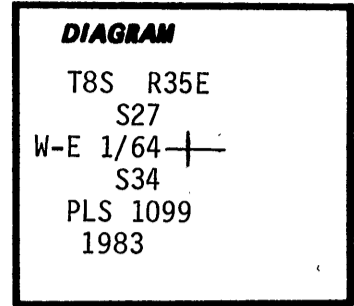

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate dist. determined by survey set a 2 1/2"x30" galvanized iron pipe with brass cap 26" in ground with raised mound marked:

From which:	T8S R35E
A Lodge Pole Pine 9" dia. bears N 9°W 15.6 ft. scribed	S27
WE 1/64 S27 BT.	W-E 1/64 +
A Lodge Pole Pine 7" dia. bears S34W 22.5 ft. scribed	S34
WE 1/64 S34 BT.	PLS 1099
	1983

Attached brass washers stamped LS 1099 to BT blaze on both trees.

Corner location perpetuated in accordance with Umatilla N.F. survey contract no. 53-04R3-2-01275.

20°E Declination, Steel Tape. August 30, 1983 Witnesses: A. Ray Crapo
Post + 5'E w/54-2 54-9 Greg Orton
Post + 5'N w/54-2 Kyle McKinney

Corner falls 50'+ into Lodge Pole Pine thicket from SW Corner of Clearcut.

Refer to Grant County Survey No. 828

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 39 day of Aug, 1984
Robert D. Deft by _____
(COUNTY OFFICIAL) (DEPUTY)

