


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

W 1/4 COR

**History of original corner establishment:**

Corner originally established by Eugene P. McCornack under Contract No. 398 dated July 1881. Set Post 3 ft. long 3 ins square 24 ins in the ground for 1/4 sec cor marked 1/4 S on W face from which  
A Fir 5 ins diam bears N50 E 32 lks dist marked 1/4 S B.T.  
A Fir 6 ins diam bears S65 W 5 lks dist marked 1/4 S B.T.

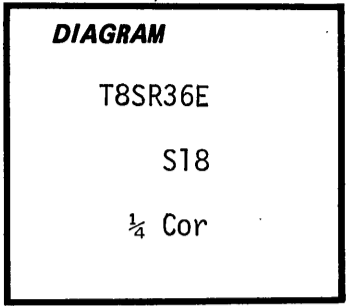

The corner was resurveyed by Otis O. Gould under Group No. 179 dated July 1937.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 18 only, with brass cap marked from which

A Pine, 10 ins diam., bears N. 78 E., 36 lks. dist., marked 1/4 S 18 BT.  
A Pine, 10 ins. diam., bears S. 24 E., 43 lks. dist., marked 1/4 S 18 BT.

1/4 S 18  
1937

**Description of corner evidence found:** At the corner I found the brass cap as described, to be in good condition from which

A dead but standing pine bears N.78 E. 36 lks. dist. with visible scribing.  
A dead but standing pine bears S. 24 E. 43 lks. dist. with visible scribing

**Description of monument and accessories I established to perpetuate the**


**original location of this corner:** From the brass cap I set two new bearing trees

A 6" fir bears S87 30' E 22.78 ft. dist. marked 1/4 S 18 BT. Nail in N. base.

A 5" fir bears N47 W 15.63 ft. dist. marked XBT. Nail in S. base.

Bearings taken with staff compass declination 18 1/2 East per 1980 Isogonic chart.

Distances pulled to 60d nails with brass washers stamped LS 1898 driven into side center of bearing trees.

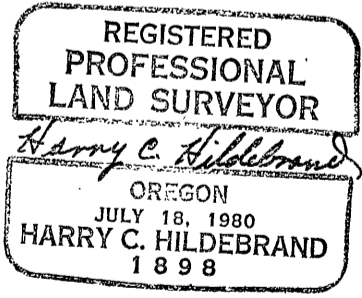

Office of..... Surveyor..... County of..... Grant.....  
State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the 23 day of..... Nov....., 1982  
*Robert D. Baggett* by.....  
(COUNTY OFFICIAL) (DEPUTY)