


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-7

History of original corner establishment:

This corner was originally established by Otis Gould, U.S. Cadastral Surveyor, under special instructions dated Nov. 27, 1935, during his surveys in July through October, 1937. The original notes state that at the corner a marked brass cap on a 1" diameter iron post 3' long was set 20" in the ground to bedrock and surrounded with a mound of stone to the top from which:

- A 10" fir bears N46°E-36 lks, marked 1/4 S32 BT.
- A 36" tamarack bears N13°W-58 lks, marked 1/4 S32 BT.

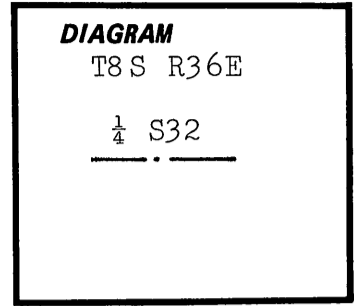

Description of corner evidence found:

A 2 1/2" brass cap on a 1" iron pipe protruding 2" from a stone mound from which:

- A 15" white fir bears N46°E-23.4' with healed blaze.
- A 29" western larch stump bears N13°W-44.8' with open blaze and visible scribing. The original notes call for this tree at 58 lks or 38.3'.

Description of monument and accessories established to perpetuate the original location of this corner:

Built mound of stone to the cap on the monument. From the monument:

- A 9 1/2" white fir bears N3°W-7.1' scribed 1/4 S32 BT.

New bearing tree has a brass washer stamped PLS 1106 nailed to the face of blaze. Attached sign 54-3 and 54-9 and painted face of blaze and a 6" red band around each bearing tree. Set steel fence post East of corner and attached sign 54-9.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

The cap is a standard GLO brass cap marked:

1/4 S32

1937

This corner was maintained on September 19, 1985.

Witness: Bob English.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

William R. Wells

**OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106**

County Surveyor Grant
Office of..... County of.....
State of Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 11 day of Feb, 1986
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)