

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 17 x 17 x 8 ins. for corner to Sections 17, 18, 19, & 20.
Raised stone mound at corner.
A small spring bears S25°E, 20 lks. dist.

N-5

DIAGRAM

T8S R26E

S18|S17

S19|S20

PLS 2645

2014


Description of corner evidence found:

No original evidence found. Monument set by double proportion. See Record Map of Survey #2026.

Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is flush with the collar of stone. Point falls just south of a 3 1/2' x 3' x 5' boulder.

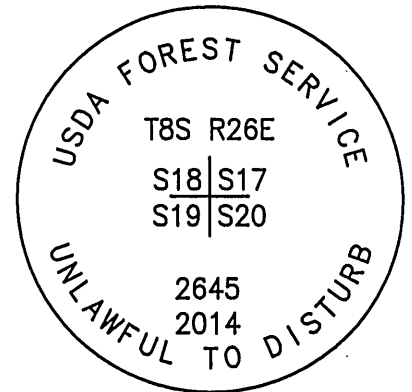

New accessories:

- A 15" Ponderosa Pine scribed "T8S R26E S20 BT" with aluminum tag marked "2645" bears S25°E, 49.1'.
- A 20" Juniper scribed "T8S R26E S19 BT" with aluminum tag marked "2645" bears S69°W, 37.3'.
- A 10" Juniper scribed "T8S R26E S18 BT" with aluminum tag marked "2645" bears N60°W, 35.7'.
- A "X" chiseled into a 2' x 3' rock bears N67°E, 14.3'.

Geodetic Coordinates (NAD83):

N 44°51'59.6"

W 119°39'06.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 9, 2014

Declination: 17° E

Witnesses: Robert Flora, Daniel Lee, Paul Guglielmelli and Toribio Quinones



EXPIRES 12-31-2018