

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 14 x 7 ins. for 1/4 Section corner.
Raised stone mound at corner.

R-3

DIAGRAM


T8S R26E
1/4 $\frac{S19}{S30}$
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Area is located on rocky western slope. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 3' diameter mound of stone. A magnet in a clear plastic was deposited at the base of pipe. Cap is 2" above the mound of stone.

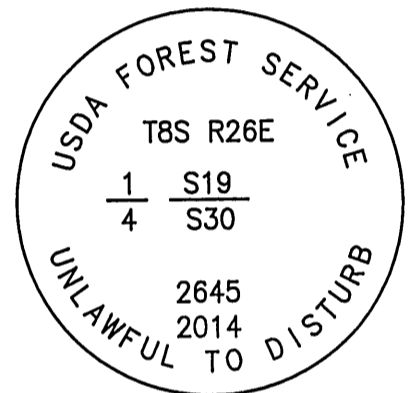

New accessories:

A 1/2" x 24" rebar with a 1 1/2" aluminum cap stamped "RM1" bears N57°16'W, 28.7'.
A 1/2" x 24" rebar with a 1 1/2" aluminum cap stamped "RM2" bears S26°14'W, 32.8'.
A 1/2" x 24" rebar with a 1 1/2" aluminum cap stamped "RM3" bears S30°39'E, 27.6'.
A 1/2" x 24" rebar with a 1 1/2" aluminum cap stamped "RM4" bears N47°32'E, 21.2'.

Geodetic Coordinates (NAD83):

N 44°51'08.4"
W 119°39'42.2"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 15, 2014

Bearings to accessories are Geodetic.

Witnesses: Robert Flora, Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018