

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

S-10

DIAGRAM

NW $\frac{1}{16}$ S28


PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the mound of stone.

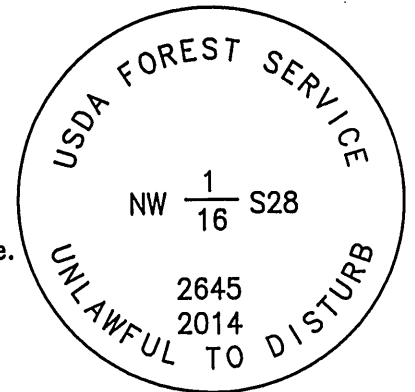

New accessories:

A 6" Juniper scribed "1/16 S28 BT" with a aluminum tag marked "2645" bears N74°E, 45.5' to a nail in the left side center of the tree above the root crown.
A 1/2" x 30" rebar with an aluminum cap marked "rm1" bears N21°W, 45.9'.

Geodetic Coordinates (NAD83):

N 44°50'55.9"
W 119°37'37.9"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 19, 2014

Declination: 17' E

Witnesses: Paul Guglielmelli and Torribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018