

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

DIAGRAM


S-N
1/64
S26 | S25
PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the mound of stone.

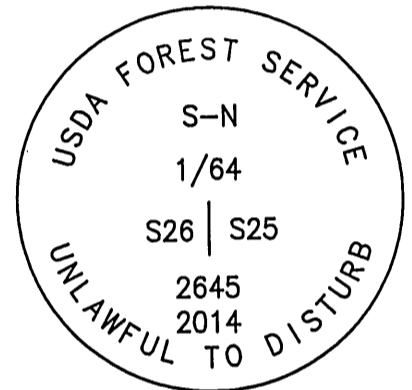

New accessories:

A 15" Ponderosa Pine scribed "S-N 1/64 S25 BT" with a aluminum tag marked "2645" bears S78°E, 19.25'.
A 10" Juniper scribed "S-N 1/64 S26 BT" with a aluminum tag marked "2645" bears S9°W, 20.15'.

Geodetic Coordinates (NAD83):

N 44°50'49.4"
W 119°34'24.0"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: July 24, 2014

Declination: 15° E

Witnesses: Carl Stout, Daniel Lee, Lisa Adair, Jesus Quiniones, Paul Guglielmelli and Lucas Beauchamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018