

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 12 x 5 ins. for 1/4 Section corner. Raised stone mound at corner.

T-1

### DIAGRAM

T8S  
R25E R26E  
1/4  
S25 | S30  
PLS 2645  
2014


## Description of corner evidence found:

Found a 17" x 11" x 5" stone, set cardinal in a 3' diameter mound of stone with "1/" of east face. A 26" Juniper with two Bearing Tree signs attached, bears N6°E, 125.6'.

## Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 4' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. The original stone was buried along the north side of the pipe. Cap is 3" above the mound of stone.

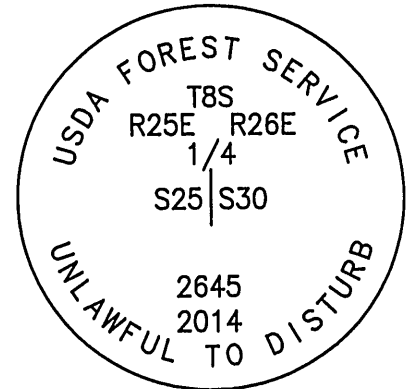

## New accessories:

A 26" Juniper scribed "1/4 S30 BT" with 1" aluminum tag marked "2645" bears N6°E, 125.6'.  
A 6" Juniper scribed "1/4 S25 BT" with 1" aluminum tag marked "2645" bears S30°W, 70.3'.  
A 1/2" x 30" rebar with 1 1/2" aluminum cap stamped "RM1" bears N53°W, 69.8'.  
A 1/2" x 30" rebar with 1 1/2" aluminum cap stamped "RM2" bears S57°E, 74.2'.

## Geodetic Coordinates (NAD83):

N 44°50'41.4"

W 119°40'18.4"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 27, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018