


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 14 x 10 x 6 ins. for 1/4 Section corner. Raised stone mound at corner.

T-5

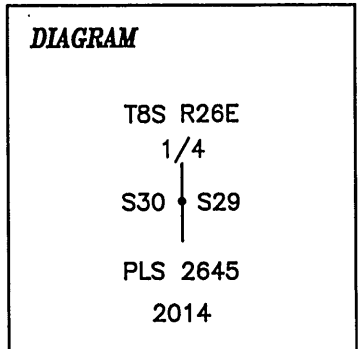


Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 1" above the collar of stone.

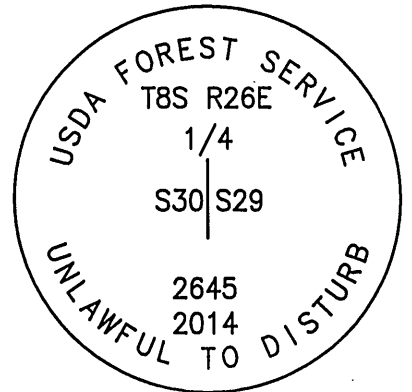

New accessories:

- A 10" Juniper scribed "1/4 S29 BT" with 1" aluminum tag marked "2645" bears S88°E, 72.2'.
- A 4" Juniper scribed "X BT" with 1" aluminum tag marked "2645" bears S64°W, 75.6'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM1" bears N75°W, 20.2'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM2" bears N17°E, 27.6'.

Geodetic Coordinates (NAD83):

N 44°50'42.9"

W 119°39'06.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 18, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Daniel Lee and Toribio Quinones

