

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 18 x 12 x 8 ins. for 1/4 Section corner. Raised stone mound at corner.

T-13

DIAGRAM


T8S R26E
1/4
S28 | S27
PLS 2645
2014

Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 3" above the collar of stone.

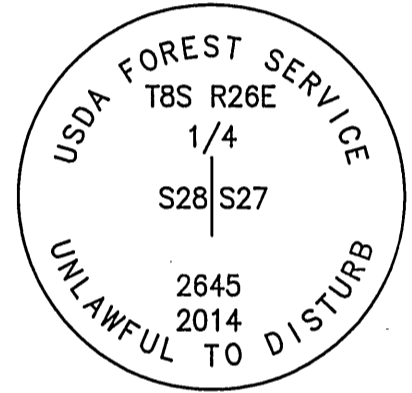

New accessories:

- A 11" Fir scribed "1/4 S27 BT" with 1" aluminum tag marked "2645" bears N26°E, 24.3'.
- A 12" Fir scribed "1/4 S28 BT" with 1" aluminum tag marked "2645" bears N54°W, 29.4'.
- A 14" Fir scribed "1/4 S28 BT" with 1" aluminum tag marked "2645" bears S57°W, 38.9'.
- A 13" Fir scribed "1/4 S27 BT" with 1" aluminum tag marked "2645" bears S55°E, 43.0'.

Geodetic Coordinates (NAD83):

N 44°50'42.0"
W 119°36'45.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 26, 2014

Declination: 17' E

Witnesses: Paul Guglielmelli, Daniel Lee and Toribio Quinones



EXPIRES 12-31-2018