

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 15 x 5 ins. for 1/4 Section corner. Raised stone mound at corner.

T-17

**DIAGRAM**


T8S R26E  
1/4  
S27 | S26  
PLS 2645  
2014

**Description of corner evidence found:**

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 3' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 4" above the mound of stone.

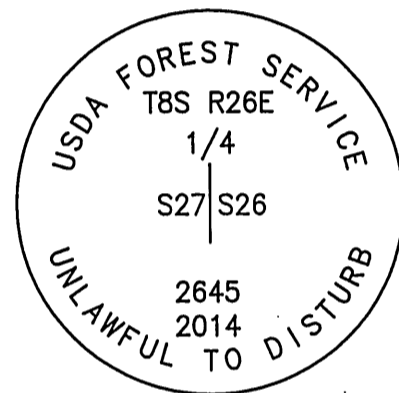

**New accessories:**

- A 13" Juniper scribed "1/4 S27 BT" with 1" aluminum tag marked "2645" bears S58°W, 20.7'.
- A 9" Ponderosa Pine scribed "1/4 S26 BT" with 1" aluminum tag marked "2645" bears S64°E, 44.1'.
- A 16" Ponderosa Pine scribed "1/4 S26 BT" with 1" aluminum tag marked "2645" bears N84°E, 116.8'.
- A 17" Ponderosa Pine scribed "1/4 S27 BT" with 1" aluminum tag marked "2645" bears N34°W, 77.1'.

**Geodetic Coordinates (NAD83):**

N 44°50'43.6"  
W 119°35'35.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 26, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Daniel Lee and Toribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018