

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 14 x 12 ins. for 1/4 Section corner. Raised stone mound at corner.

V-17

DIAGRAM

T8S R26E

S27 | S26

S34 | S35

PLS 2645


2014

Description of corner evidence found:

No original evidence found. Area falls on a rocky slope on the West side of Thorne Springs Butte. Monument set by double proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 1" above the mound of stone.

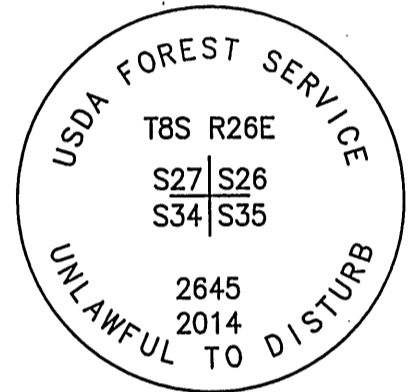

New accessories:

- A 19" Juniper scribed "T8S R26E S27 BT" with 1" aluminum tag marked "2645" bears N19°W, 120.1'.
- A 1/2" x 30" rebar with a 1 1/2" aluminum cap marked "RM1" bears N56°E, 44.7'.
- A 1/2" x 30" rebar with a 1 1/2" aluminum cap marked "RM2" bears S38°E, 42.8'.
- A 1/2" x 30" rebar with a 1 1/2" aluminum cap marked "RM3" bears S64°W, 26.0'.

Geodetic Coordinates (NAD83):

N 44°50'17.8"

W 119°35'33.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 25, 2014

Declination: 17° E

Witnesses: Daniel Lee, Paul Guglielmelli and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018