


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 12 x 8 x 8 ins. for 1/4 Section corner. Raised stone mound at corner.

V-23

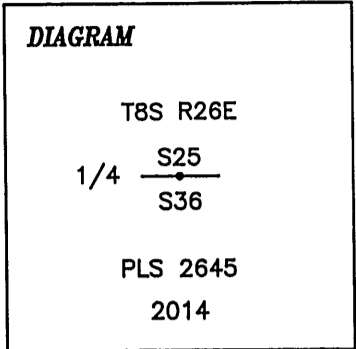


Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone, . A magnet in a clear plastic case was deposited at the base of pipe. Cap is 1" above the mound of stone.

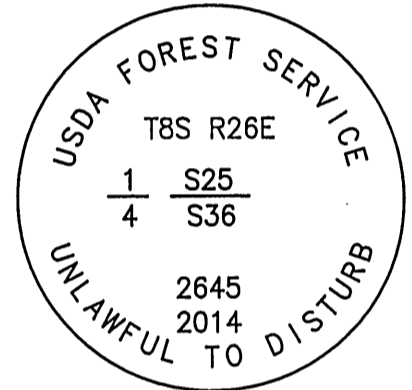

New accessories:

- A 11" Ponderosa Pine scribed "1/4 S25 BT" with 1" aluminum tag marked "2645" bears N76°E, 39.5'.
- A 19" Ponderosa Pine scribed "1/4 S25 BT" with 1" aluminum tag marked "2645" bears N34°W, 46.4'.
- A 11" Ponderosa Pine scribed "1/4 S36 BT" with 1" aluminum tag marked "2645" bears S33°W, 60.7'.
- A 6" Fir scribed "X" & "BT" with 1" aluminum tag marked "2645" bears S23°E, 15.65'.

Geodetic Coordinates (NAD83):

N 44°50'17.4"  
W 119°33'46.0"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: July 30, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Robert Flora, Lucas Beauchamp, and Toribio Quinones

