


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 16 x 16 x 8 ins. for cor. to Secs 25, 36, 30, & 31.
Raised stone mound at corner.

V-25

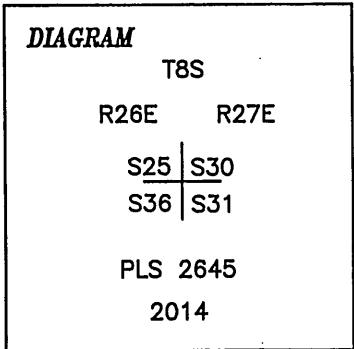

Description of corner evidence found:


Found a 17 x 16 x 8 stone in a mound of stone.

Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3 3/4" Brass Rock Cap marked as shown in bedrock.

Corner is on a western slope. Original stone was placed to the west and was covered with a mound of stone.

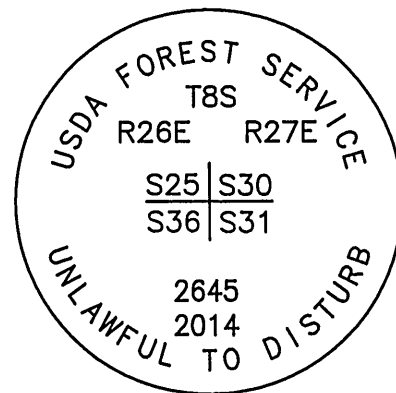

New accessories:

- A 1/2" x 30' rebar with 1 1/2" Aluminum cap marked "UMNF RM1" bears N8°W, 31.0'.
- A 1/2" x 30' rebar with 1 1/2" Aluminum cap marked "UMNF RM2" bears S42°30'W, 13.4'.
- A 1/2" x 30' rebar with 1 1/2" Aluminum cap marked "UMNF RM3" bears N61°E, 14.0'.
- A 14" Double Bole Juniper scribed "T8S R27E S31 BT" with 1" aluminum tag marked "2645" bears N87°30'E, 51.9'.

Geodetic Coordinates (NAD83):

N 44°50'18.5"

W 119°33'11.8"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: July 30, 2014

Declination: 17° E

Witnesses: Carl Stout, Paul Guglielmelli, Robert Flora, Lucas Beauchamp, and Toribio Quinones



EXPIRES 12-31-2018