

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established. See Record Map of Survey No. 2026

X-10

**DIAGRAM**

W 1/16

C — C  
S33


PLS 2645  
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3 1/4" Aluminum Rock Cap set into bedrock and marked as shown.  
A "PK" nail was set in the cement under the cap.

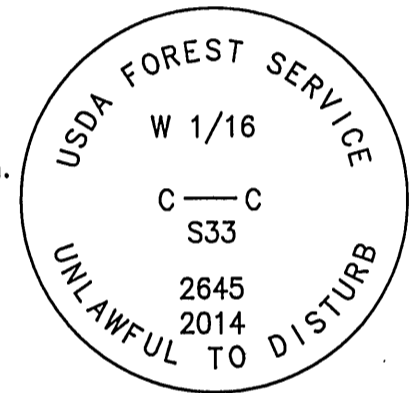

New accessories:

A 1/2" x 24" rebar with a 1 1/4" aluminum cap stamped "RM1" bears N49°E, 47.8'.  
A 1/2" x 24" rebar with a 1 1/4" aluminum cap stamped "RM2" bears N02°W, 55.5'.

Geodetic Coordinates (NAD83):

N 44°49'50.1"  
W 119°37'37.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 7, 2014

Bearings to accessories are Geodetic.

Witnesses: Robert Flora, Paul Guglielmelli and Torribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Mark A. Lichtenthaler*  
OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018