

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 10 x 8 x 8 ins. for 1/4 Section corner. Raised stone mound at corner.

X-13

DIAGRAM




Description of corner evidence found:

No original evidence found. Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 3' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 1 1/2" above the mound of stone.

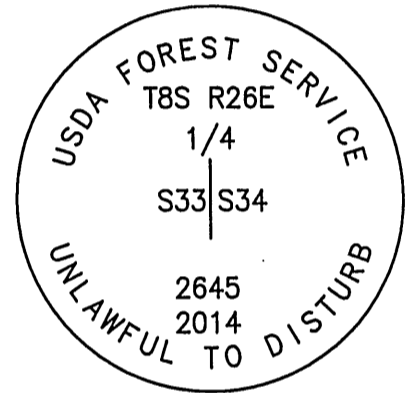

New accessories:

- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM1" bears N37°E, 34.3'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM2" bears N59°W, 21.0'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM11" bears S50°E, 24.1'.
- A 1/2" x 24" rebar with 1 1/2" aluminum cap marked "RM12" bears S58°W, 20.6'.

Geodetic Coordinates (NAD83):

N 44°49'50.6"

W 119°36'44.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 6, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Robert Flora and Toribio Quinones

